



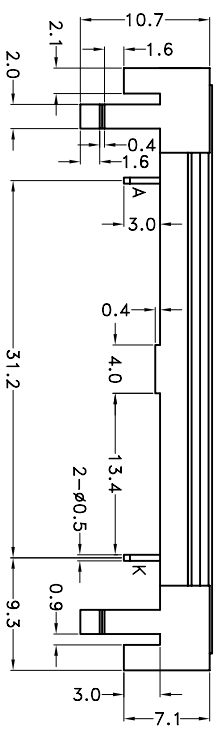


VERSION	CHANGE CONTENT	DATE
V00	FIRST ISSUE	2012-07-30
V01	CHANGE BACKLIGHT	2012-08-02
V02	DELETE LED	2012-12-06
V03	ADD LED	2013-02-28
V04	ADD LED SIZE	2014-06-18

PIN	NAME
1	/CS1
2	/RST
3	A0
4	WR
5	RD
6	DB0
7	DB1
8	DB2
9	DB3
10	DB4
11	DB5
12	DB6
13	DB7
14	VDD
15	VSS
16	VOUT
17	CAP3+
18	CAP1-
19	CAP1+
20	CAP2+
21	CAP2-
22	V4
23	V3
24	V2
25	V1
26	V0
27	NC
28	C86
29	P/S
30	NC

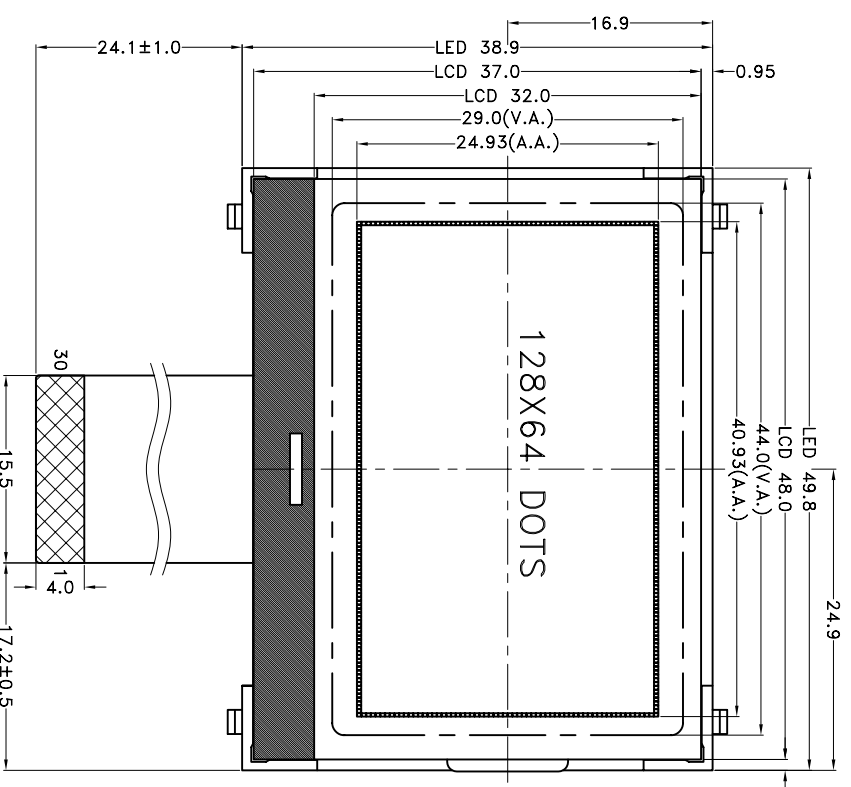

SPECIFICATIONS

1. DISPLAY TYPE: FSTN/TRANSPARENT/POSITIVE
2. LCD DRIVING VOLTAGE: 9.0V
3. LOGIC VOLTAGE: 3.3V
4. VIEWING DIRECTION: 6 O'CLOCK
5. OPERATING TEMP: -20° C ~ +70° C
6. STORAGE TEMP: -30° C ~ +80° C
7. DRIVE MODE: 1/64 DUTY 1/9BIAS
8. BACKLIGHT: WHITE/SIDE BACKLIGHT/3.1V
- MECHANICAL TOL. ±0.3 UNLESS SPECIFIED

NOTE:

1	2	5	6
---	---	---	---

DESCRIPTION:

C/D

SCALE: FIT	TINSHARP	TINSHARP
SHEET: 1 OF 1	INDUSTRIAL CO.,LTD.	
PROJECTION	MODEL	SERIAL NUMBER
UNIT: mm	TG12864-COG33A	ZMQ0288
APP:	CHK:	DWN:
DATE:	DATE:	DATE: