

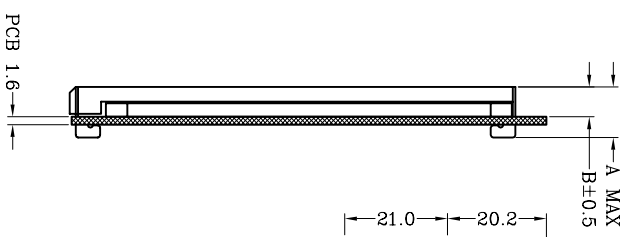
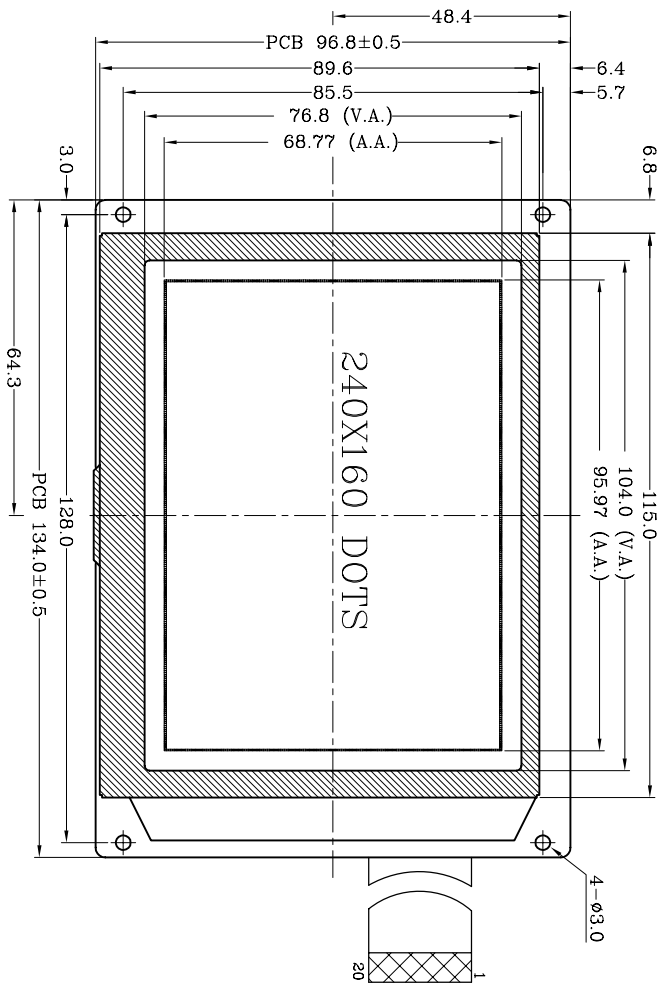



| VERSION | CHANGE CONTENT | DATE |
|---------|----------------|------------|
| V00 | FIRST ISSUE | 2015-01-13 |
| V01 | CHANGE BZL | 2015-02-03 |



| TYPE | A | B |
|---------|------|-----|
| LED B/L | 10.8 | 6.1 |

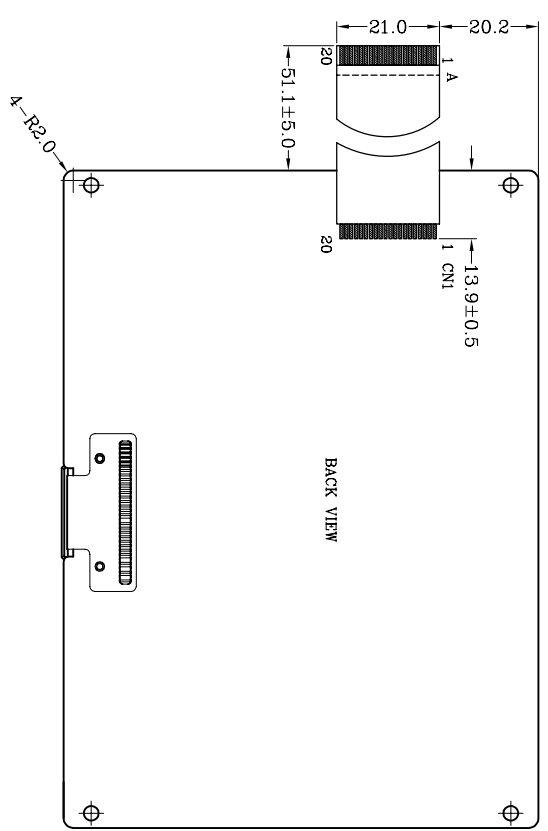

DETAIL A VIEW
SCALE: 10:1

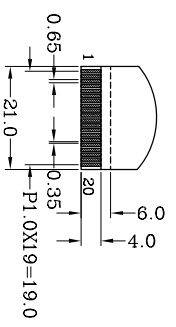

DETAIL B VIEW
SCALE: 1:1

CNI:

| NAME | VSS | VSS | VDD | NC | V0 | A0 | /WR | /RD | DB0 | DB1 | DB2 | DB3 | DB4 | DB5 | DB6 | DB7 | /CS | /RES | LED+ | LED- |
|------|-----|-----|-----|----|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|------|------|
| PIN | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 |



SPECIFICATIONS

- DISPLAY TYPE: FSTN/TRANSFLECTIVE/POSITIVE/B-W
- LCD DRIVING VOLTAGE: 15.5V
- LOGIC VOLTAGE: 3.3V
- VIEWING DIRECTION: 6 O'CLOCK
- OPERATING TEMP: -20° C~70° C
- STORAGE TEMP: -30° C~80° C
- DRIVE MODE: 1/160 DUTY, 1/11 BIAS
- BACKLIGHT: WHITE/SIDE BACKLIGHT/5.0V
- OTHER:

NOTE:

MECHANICAL TOL: ±0.3 UNLESS SPECIFIED

DESCRIPTION:

C/D

SCALE: FIT
SHEET: 1 OF 1
TINSHARP INDUSTRIAL CO., LTD.

MODEL: TG240160D-01
SERIAL NUMBER: ZHU0118

| UNIT: | PROJECTION | CHK: | DWN: |
|-------|------------|------|------|
| mm | | | |
| APP: | | | |
| DATE: | | | |