


| VER | DESCRIPTION | Date |
|-----|-------------|------------|
| V00 | FIRST ISSUE | 2009-10-22 |
| V01 | 删除LED | 2011-06-08 |

A

A

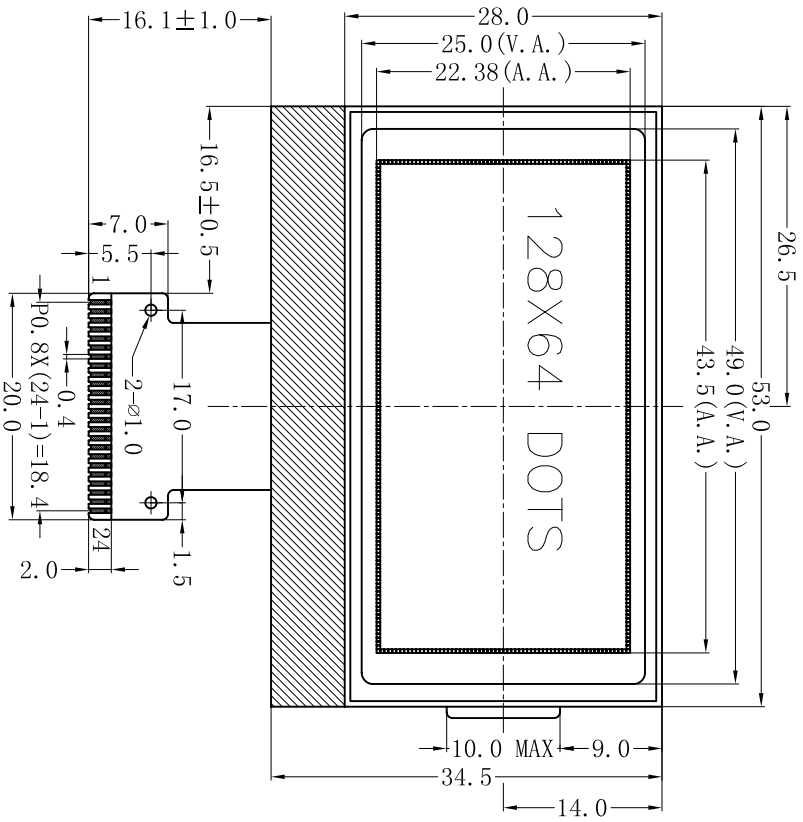


VIEWING

| PIN | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|------|------|------|------|------|------|------|-----|-----|-----|-----|-----|-----|
| NAME | VLCD | VB0+ | VB0- | VBI- | VBI+ | TST4 | VSS | VDD | ID | BM1 | BM0 | D7 |
| PIN | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 |
| NAME | D6 | D5 | D4 | D3 | D2 | D1 | DO | WR1 | WR0 | CD | RST | CS0 |


SPECIFICATIONS

1. DISPLAY TYPE: FSTN / TRANSPARENT / POSITIVE / B-W
 2. LCD DRIVING VOLTAGE: 9.0 V
 3. LOGIC VOLTAGE: 3.3 V
 4. VIEWING DIRECTION: 6 O'CLOCK
 5. OPERATING TEMP: -20° C -- +70° C
 6. STORAGE TEMP: -30° C -- +80° C
 7. DRIVE MODE: 1 / 65 DUTY, 1 / 9 BIAS
- MECHANICAL TOL: ± 0.3 UNLESS SPECIFIED

NOTE:

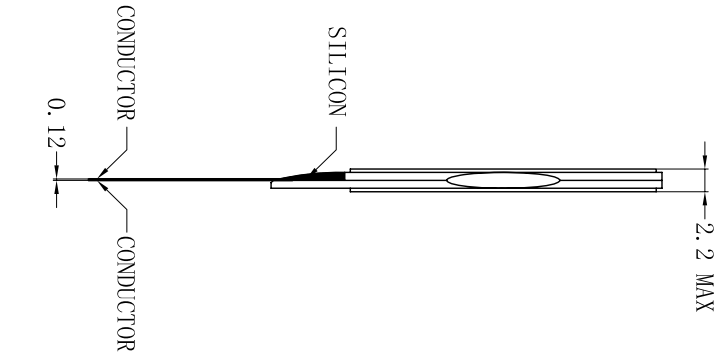

DETAIL DOTS
SCALE: 20:1



DESCRIPTION:

C/D

SCALE: FIT
SHEET: 1 OF 1
TINSHARP INDUSTRIAL CO., LTD.



TINSHARP
INDUSTRIAL CO., LTD.
MODEL
TG12864-C0625
SERIAL NUMBER
LXI0926

| UNIT: | PROJECTION | MODEL | SERIAL NUMBER |
|-------|------------|---------------|---------------|
| mm | | TG12864-C0625 | LXI0926 |
| APP: | CHK: | DWN: | |
| DATE: | DATE: | DATE: | |